




THE SPECIFICATION OF THREADED ROD				
RIGHT HAND UNC COARSE THREAD				
DIAMETER	NOMINAL SIZE	D (Major Diameter)		FINISH
		Max.	Min.	
1/4 - 20	0.2500	0.2489	0.2367	BRIGHT / ZINC / HOT DIPPED GALV / STAINLESS
5/16 - 18	0.3125	0.3133	0.2982	BRIGHT / ZINC / HOT DIPPED GALV / STAINLESS
3/8 - 16	0.3750	0.3737	0.3595	BRIGHT / ZINC / HOT DIPPED GALV / STAINLESS
7/16 - 14	0.4375	0.4361	0.4206	BRIGHT / ZINC / HOT DIPPED GALV / STAINLESS
1/2 - 13	0.5000	0.4985	0.4822	BRIGHT / ZINC / HOT DIPPED GALV / STAINLESS
5/8 - 11	0.6250	0.6233	0.6051	BRIGHT / ZINC / HOT DIPPED GALV / STAINLESS
3/4 - 10	0.7500	0.7482	0.7288	BRIGHT / ZINC / HOT DIPPED GALV / STAINLESS
7/8 - 9	0.8750	0.8731	0.8523	BRIGHT / ZINC / HOT DIPPED GALV / STAINLESS
1 - 8	1.000	0.998	0.9755	BRIGHT / ZINC / HOT DIPPED GALV / STAINLESS
1 - 12	1.000	0.9982	0.9810	BRIGHT / ZINC / HOT DIPPED GALV / STAINLESS
1-1/8 - 7	1.125	1.1228	1.0982	BRIGHT / ZINC / HOT DIPPED GALV / STAINLESS
1-1/4 - 7	1.250	1.2478	1.2232	BRIGHT / ZINC / HOT DIPPED GALV / STAINLESS
1-1/2 - 6	1.500	1.4976	1.4703	BRIGHT / ZINC / HOT DIPPED GALV / STAINLESS

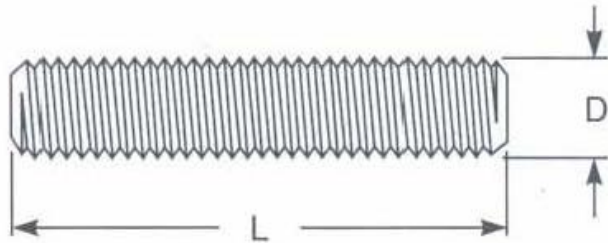

**SPECIFICATION REQUIREMENTS**

- Dimensions: See major and length requirement above
- Material & Mechanical Properties: Meets the minimum mechanical requirements of ASTM A 307 Grade A (minimum tensile of 60 kpsi) or ASTM F1554 (minimum tensile of 58 kpsi)
- Thread Requirements: Roll thread to ANSI B1.1 UNC Class 1A
- Coating:
  - Zinc Plated Fe/Zn 3A per ASTM F1941 (CR6+)
  - HDG Per ASTM A153 or F2329
  - Stainless AISI 304